




PNL201210M-SERIES-A



Applications

- Noise suppression for motors : windshield wipers / power seats / power mirrors / heating and ventilation blower / HID lighting
- Engine and transmission control units
- DC/DC converters for entertainment/navigation systems
- LED drivers
- Battery power systems


Picture




Environmental data

- Operating temperature range : -50°C ~ +125°C(component)
- Storage conditions (packaged) : -25°C ~ +40°C, ≤75% RH
- Complies with AEC-Q200 standard

Dimensions [Unit : mm]

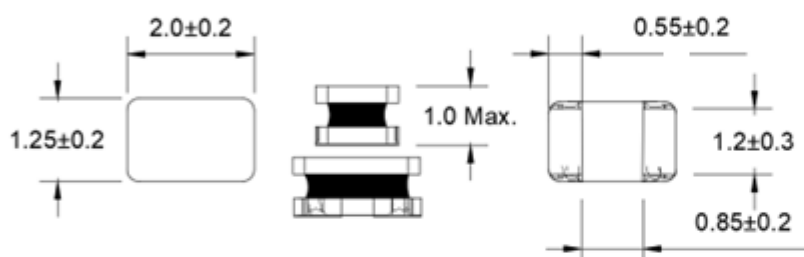

Land Pattern [Unit : mm]



Specifications

Part No.	L0 Inductance(μH) 100kHz, 1V, 0A	DCR (mΩ)		Saturation Current DC(A) a)	Heating Rating Current DC(A) b)
		TYP.	MAX.	MAX.	MAX.
PNL201210M-R33M-A	0.33±20%	26	33	4	3.6
PNL201210M-R47M-A	0.47±20%	34	45	3.5	3.1
PNL201210M-R68M-A	0.68±20%	62	76	3.3	2
PNL201210M-1R0M-A	1.0±20%	92	110	3	1.6
PNL201210M-2R2M-A	2.2±20%	305	366	2	1
PNL201210M-4R7M-A	4.7±20%	465	558	1.4	0.7

Notes

- * All test data is referenced to 25 °C ambient
- a) DC current (A) that will cause L0 to drop approximately 30 %
- b) DC current (A) that will cause an approximate ΔT of 40 °C

Packing Q'ty (PCS)

- * Reel : 2,000
- * Box : 100,000



PNL201210M-SERIES-A

Performance Graph

— Inductance (uH)
— Temperature Rise (°C)

