



SPI050-30-SERIES-A




■ Applications

- Noise suppression for motors : windshield wipers / power seats / power mirrors / heating and ventilation blower / HID lighting
- Engine and transmission control units
- DC/DC converters for entertainment/navigation systems
- LED drivers
- Battery power systems


■ Environmental data

- Operating temperature range : -55°C ~ +155°C(component)
- Storage conditions (packaged) : -25°C ~ +40°C, ≤75% RH
- Complies with AEC-Q200 standard


■ Dimensions [Unit : mm]

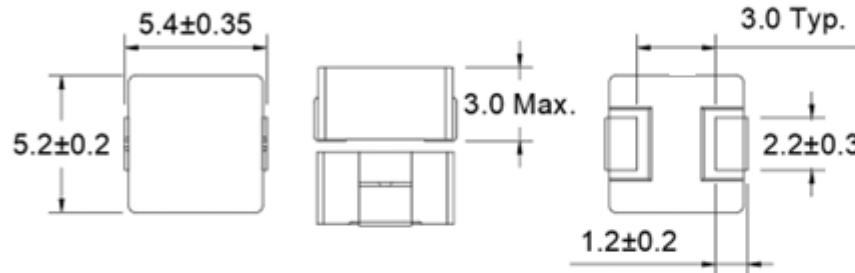

■ Picture



■ Land Pattern [Unit : mm]



■ Specifications

Part No.	L0 Inductance(uH) 100kHz, 1V, 0A	DCR (mΩ)		Saturation Current DC(A) a)	Heating Rating Current DC(A) b)
		TYP.	MAX.		
SPI050-30-R10M-A	0.10 ± 20%	2.5	3	30	25
SPI050-30-R20M-A	0.20 ± 20%	3.2	3.9	20	14
SPI050-30-R33M-A	0.33 ± 20%	4.5	5.5	18	14
SPI050-30-R47M-A	0.47 ± 20%	7	8.5	15	11
SPI050-30-R68M-A	0.68 ± 20%	10	12	11.5	9
SPI050-30-1R0M-A	1.0 ± 20%	11.6	14	10	8.5
SPI050-30-1R2M-A	1.2 ± 20%	13.3	16	9.5	8.5
SPI050-30-1R5M-A	1.5 ± 20%	20.8	25	9	8.2
SPI050-30-2R2M-A	2.2 ± 20%	24.1	29	7	7
SPI050-30-3R3M-A	3.3 ± 20%	31.6	38	6	5.5
SPI050-30-4R7M-A	4.7 ± 20%	50	60	4.6	4.5
SPI050-30-6R8M-A	6.8 ± 20%	75	90	3.6	3.5
SPI050-30-100M-A	10.0 ± 20%	104.1	125	3.5	3.2
SPI050-30-220M-A	22.0 ± 20%	206.6	248	2.3	1.7

■ Notes

* All test data is referenced to 25 °C ambient

a) DC current (A) that will cause L0 to drop approximately 30 %

b) DC current (A) that will cause an approximate ΔT of 40 °C

■ Packing Q'ty (PCS)









* Reel : 2,000

* Box : 10,000



SPI050-30-SERIES-A

■ Performance Graph

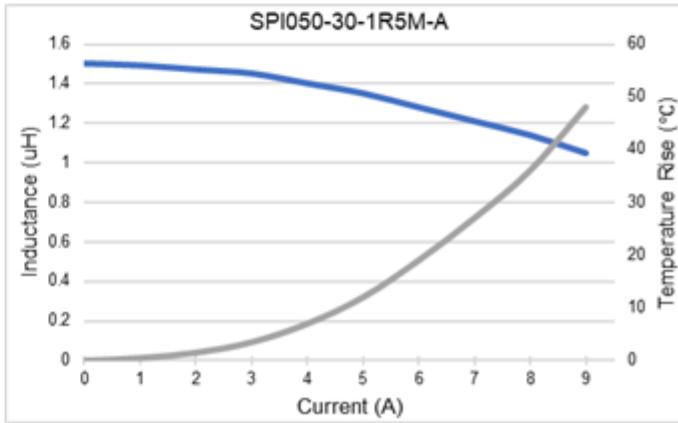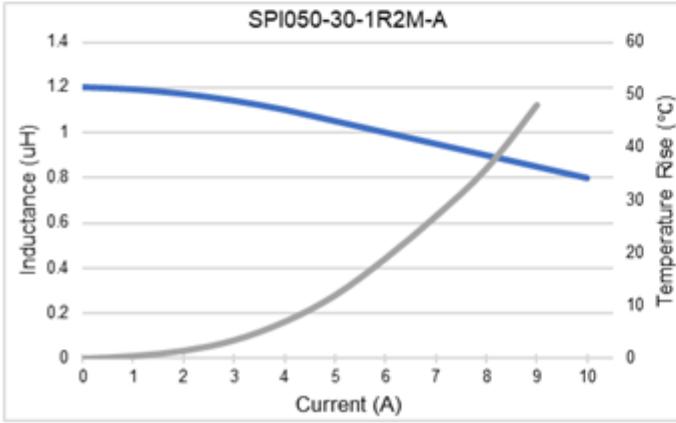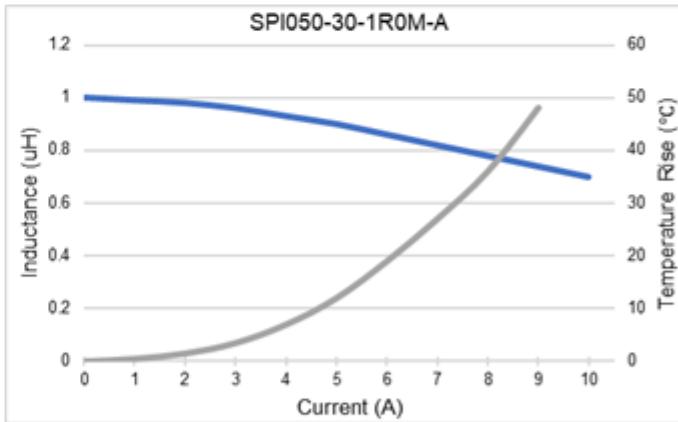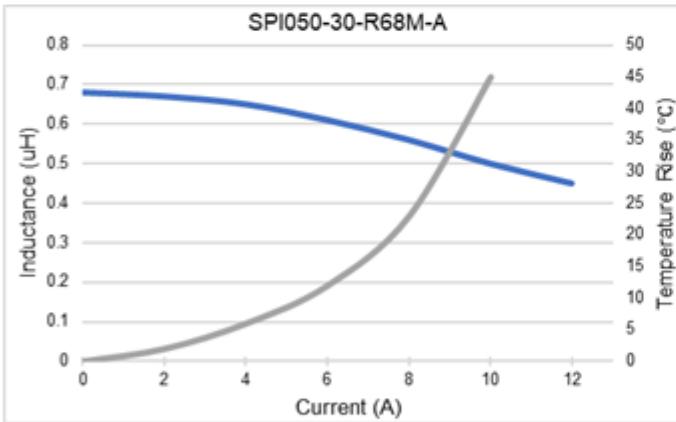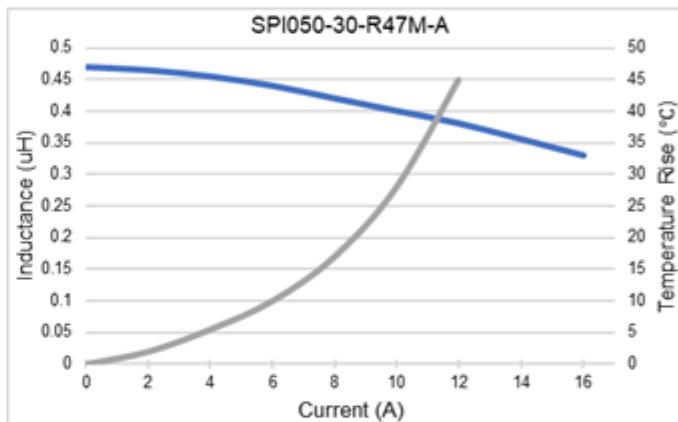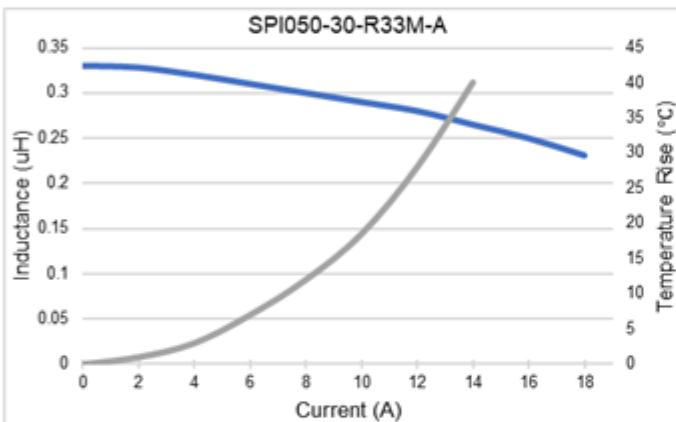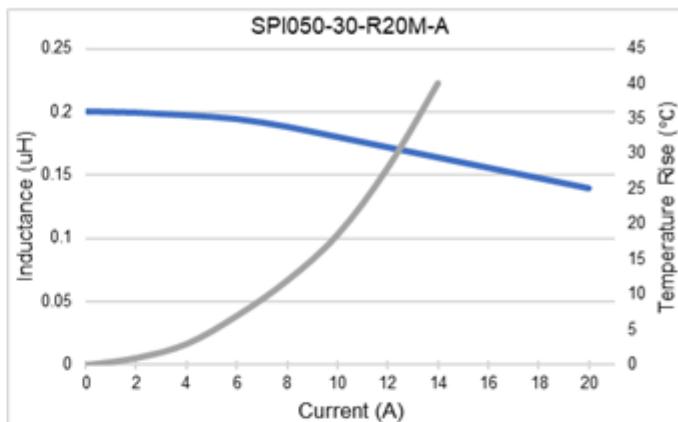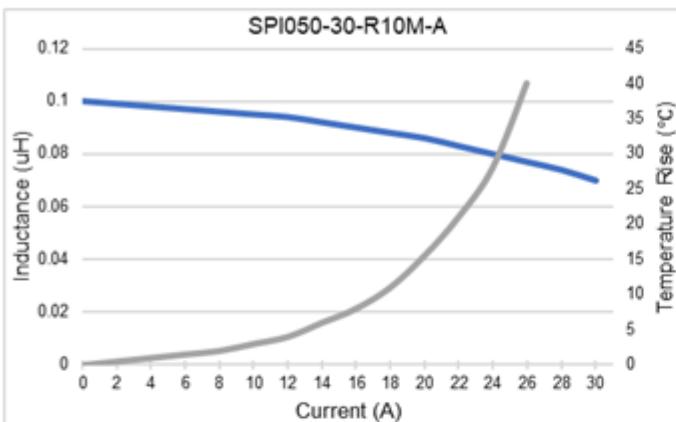



SPI050-30-SERIES-A

■ Performance Graph

